



Motorola Moto 360 LCD Display Replacement

This guide will show you how to remove and replace the Moto 360 LCD screen.

Written By: Cole Twitchell



INTRODUCTION

The entirety of the Moto 360 is very fragile. Take extreme caution when using tools.

TOOLS:

- [iOpener Kit](#) (1)
 - [Jimmy](#) (1)
-

Step 1 — Rear Cover



- Set the watch face down on a flat surface.
- Place the heated [iOpener](#) on the face of the rear cover to loosen the adhesive underneath.

Step 2



- Gently slide the blue opening pick between the rear cover and the metal casing.
 - ⚠ The rear cover is extremely fragile. Be very delicate when using the opening pick.
- Work your way entirely around the rear cover.
 - ⓘ It may take several attempts of reheating the adhesive to get the rear cover loose enough to pull off.

Step 3




- Once the adhesive has been successfully loosened, gently pull the rear cover off.

Step 4 — O-Ring



- To get to the O-Ring, use the Jimmy to gently pry off the rear housing.

Step 5

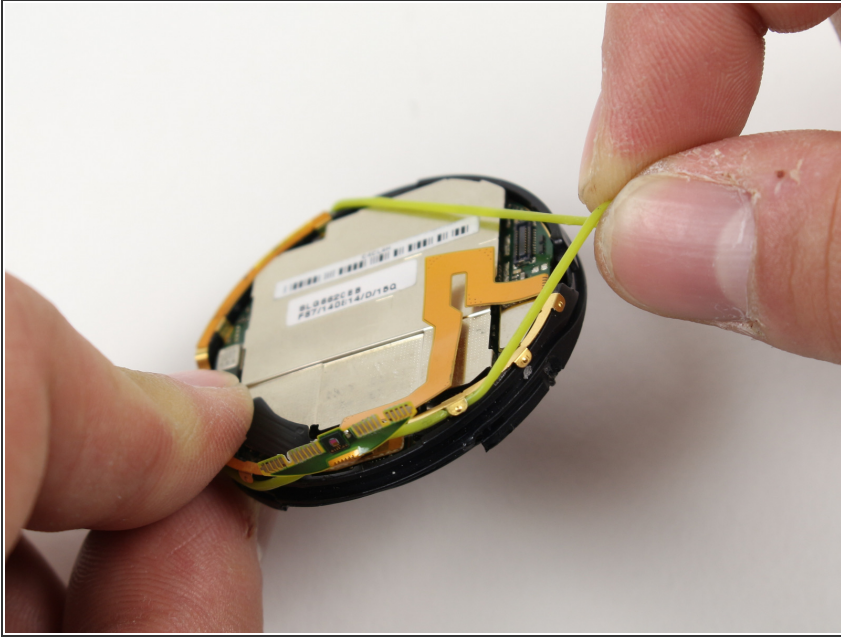


- Pinch the green rubber O-Ring and slide it off of the watch.
- ⚠ The O-Ring is delicate and is easily severed. Use care around sharp objects.

Step 6 — LCD Display





- Set the Moto 360 face up on a flat surface.
- Place the [iOpener](#) on the face of the device screen.

Step 7

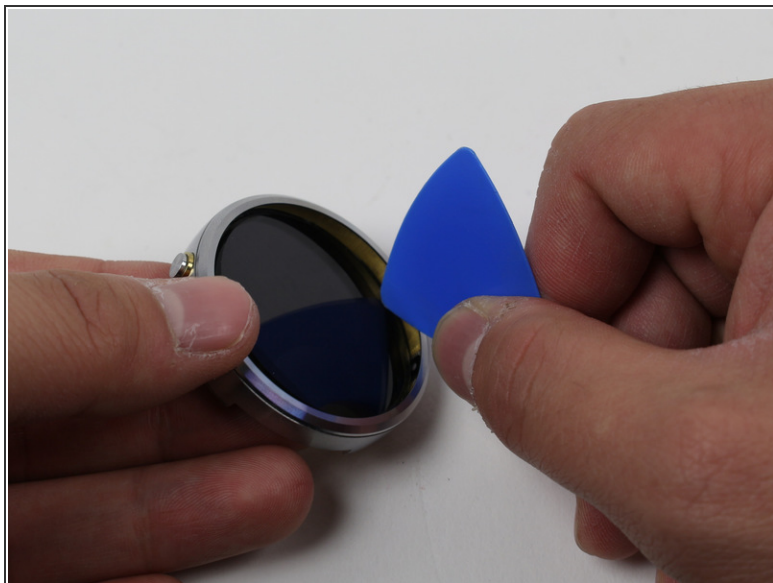

- Gently slide the opening pick between the screen and the metal casing.
- Work your way around the face of the screen, loosening the adhesive.

Step 8

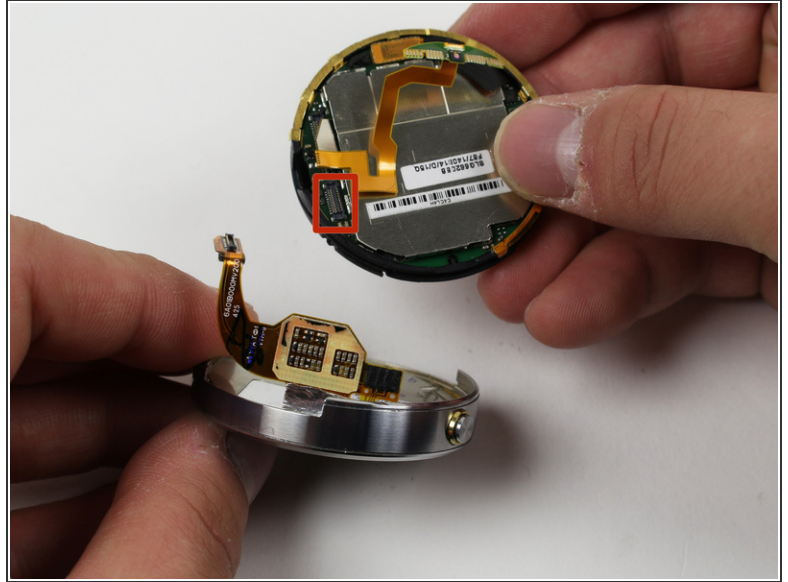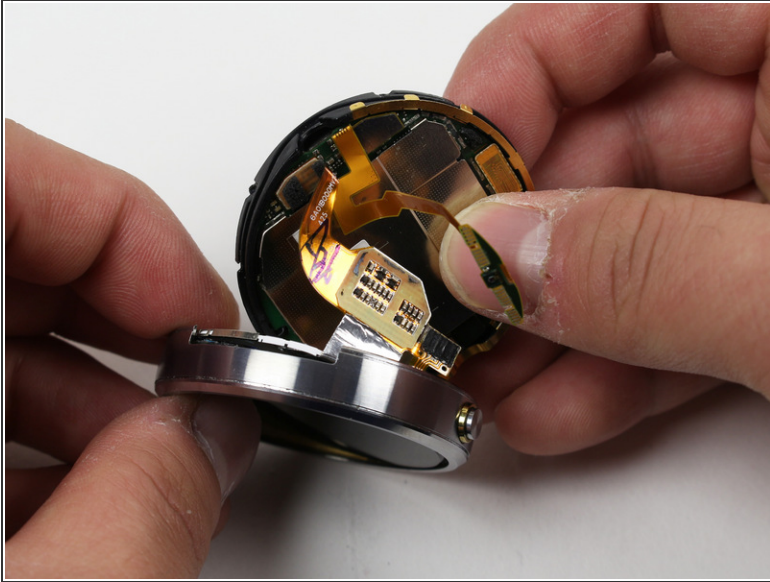

- Detach the copper ribbon connecting the motherboard to the display.

- For reassembly, attach copper ribbon where it is marked.

⚠ The copper ribbon is fragile and easily disconnects. Remember where it goes so as to reconnect it properly.

Step 9



- Slide the display out of the metal casing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 08:33:14 PM.